


PNP PLASTIC ENCAPSULATE TRANSISTOR

MAXIMUM RATINGS (T_a = 25 °C)


Characteristic	Symbol	Value	Unit
Collector Base Voltage	V _{CB0}	-160	V
Collector Emitter Voltage	V _{CE0}	-150	V
Emitter Base Voltage	V _{EB0}	-5	V
Collector Current	I _C	-0.6	A
Power Dissipation	P _C	0.625	W
Operation and Storage Junction Temperature Range	T _j , T _{stg}	-55 ~ 150	°C

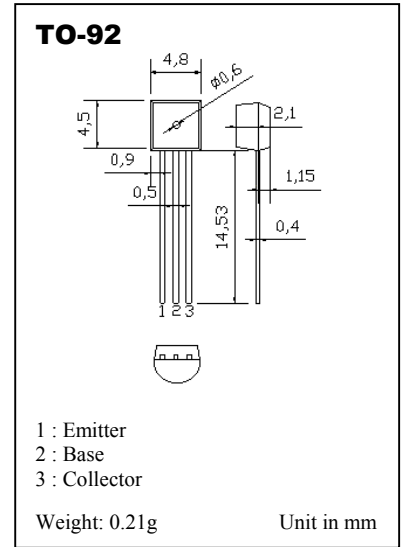

ELECTRICAL CHARACTERISTICS (T_a = 25 °C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector Cutoff Current	I _{CBO}	V _{CB} =-120V, I _E =0	-	-	-0.1	µA
Emitter Cutoff Current	I _{EBO}	V _{EB} =-4V, I _C =0	-	-	-0.1	µA
Collector Base Breakdown Voltage	V _{(BR)CBO}	I _C =-100µA, I _E =0	-160	-	-	V
Collector Emitter Breakdown Voltage	V _{(BR)CEO}	I _C =-1mA, I _B =0	-150	-	-	V
Emitter Base Breakdown Voltage	V _{(BR)EBO}	I _E =-10µA, I _C =0	-5	-	-	V
DC Current Gain	h _{FE} (1)	V _{CE} =-5V, I _C =-1mA	80	-	-	-
	h _{FE} (2)	V _{CE} =-5V, I _C =-10mA	80	-	250	-
	h _{FE} (3)	V _{CE} =-5V, I _C =-50mA	50	-	-	-
Collector Emitter Saturation Voltage	V _{CE(sat)}	I _C =-50mA, I _B =-5mA	-	-	-0.5	V
Base Emitter Saturation Voltage	V _{BE(sat)}	I _C =-50mA, I _B =-5mA	-	-	-1	V
Transition Frequency	f _T	V _{CE} =-5V, I _C =-10mA f=30MHz	100	-	300	MHz

PNP PLASTIC ENCAPSULATE AMPLIFIER



CLASSIFICATION OF h_{FE}(2)

Rank	A	B	C
Range	80 to 160	120 to 180	150 to 250

PMC reserves the right to make changes without further notice to any products herein. **PMC** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **PMC** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential damages. The examples of applied circuits are provided as reference to the reader therefore we shall not undertake any responsibility for the exercise of rights by third parties.