


PNP SILICON TRIPLE DIFFUSED TRANSISTOR

...designed for audio frequency power amplifier applications.
 ...complementary to PMD718.

MAXIMUM RATINGS (Ta = 25 °C)

Characteristic	Symbol	Value	Unit
Collector Base Voltage	V _{CB0}	-120	V
Collector Emitter Voltage	V _{CEO}	-120	V
Emitter Base Voltage	V _{EBO}	-5	V
Collector Current	I _C	-8	A
Base Current	I _B	-0.8	A
Collector Power dissipation T _c = 25 °C	P _C	80	W
Junction Temperature	T _j	150	°C
Storage Temperature Range	T _{stg}	-55 ~ 150	°C

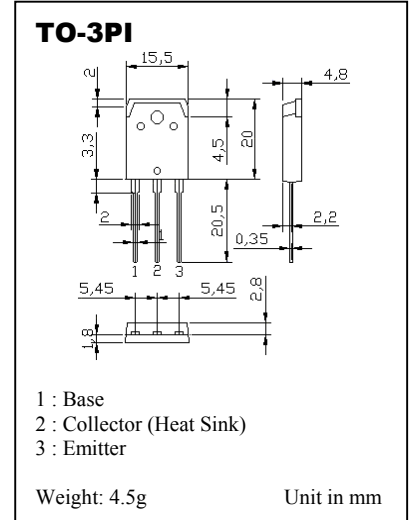


ELECTRICAL CHARACTERISTICS (Ta = 25 °C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector Cutoff Current	I _{CBO}	V _{CB} = -120V, I _E = 0	-	-	-10	μA
Emitter Cutoff Current	I _{EBO}	V _{EB} = -5V, I _C = 0	-	-	-10	μA
Collector Emitter Breakdown Voltage	V _{(BR)CEO}	I _C = -50mA, I _B = 0	-120	-	-	V
DC Current Gain	h _{FE}	V _{CE} = -5V, I _C = -1A	55	-	160	-
Collector Emitter Saturation Voltage	V _{CE(sat)}	I _C = -5A, I _B = -0.5A	-	-	-2.5	V
Base Emitter Voltage	V _{BE}	V _{CE} = -5V, I _C = -5A	-	-	-1.5	V
Transition Frequency	f _T	V _{CE} = -5V, I _C = -1A	-	10	-	MHz
Collector Output Capacitance	C _{ob}	V _{CE} = -10V, I _E = 0, f = 1MHz	-	280	-	pF

**PNP SILICON
 TRIPLE DIFFUSED
 TRANSISTOR**

CLASSIFICATIONS OF h_{FE}

Rank	R	O
Range	55 to 110	80 to 160



PMC reserves the right to make changes without further notice to any products herein. **PMC** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **PMC** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential damages. The examples of applied circuits are provided as reference to the reader therefore we shall not undertake any responsibility for the exercise of rights by third parties.